

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$ **3500 A**
 V_{DRM}/V_{RRM} **4600-5500V**
 I_{TSM} **45 kA**
 I^2t **10130 10³A²S**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _J (°C)	VALUE			UNIT
					Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Double side cooled,	T _C =70°C	125			3500	A
V _{DRM} V _{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms		125	4600		5500	V
I _{DRM} I _{RRM}	Repetitive peak current	at V _{DRM} at V _{RRM}		125			500	mA
I _{TSM}	Surge on-state current	10ms half sine wave V _R =0.6V _{RRM}		125			45	kA
I ² t	I ² t for fusing coordination						10130	A ² s*10 ³
V _{TO}	Threshold voltage			125			1.02	V
r _T	On-state slope resistance						0.21	mΩ
V _{TM}	Peak on-state voltage	I _{TM} =3000A, F=90kN		25			1.54	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}		125			2000	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} to 3000A, Gate pulse tr ≤0.5μs IGM=1.5A		125			250	A/μs
Q _{rr}	Recovery charge	I _{TM} =2000A, tp=2000μs, di/dt=-5A/μs, V _R =50V		125		5000		μC
I _{GT}	Gate trigger current				40		300	mA
V _{GT}	Gate trigger voltage	V _A =12V, I _A =1A		25	0.8		3.0	V
I _H	Holding current				25		250	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}		125	0.3			V
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 90kN					0.0057	°C /W
R _{th(c-hs)}	Thermal resistance case to heatsink						0.0015	°C /W
F _m	Mounting force				81	90	108	kN
T _{stg}	Stored temperature				-40		140	°C
W _t	Weight					2500		g
Outline	KT100dT							

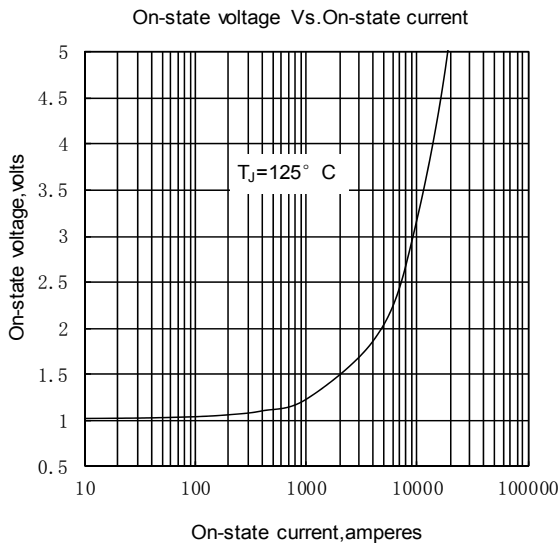


Fig. 1

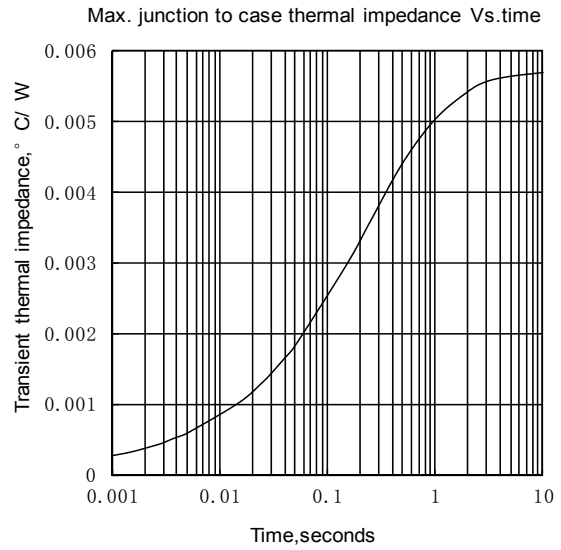


Fig. 2

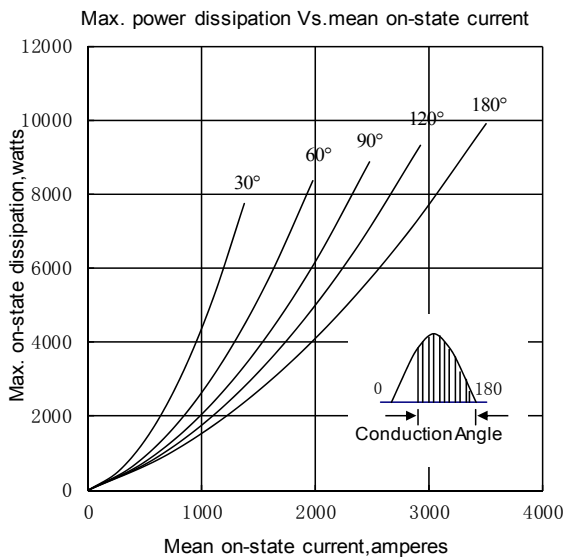


Fig. 3

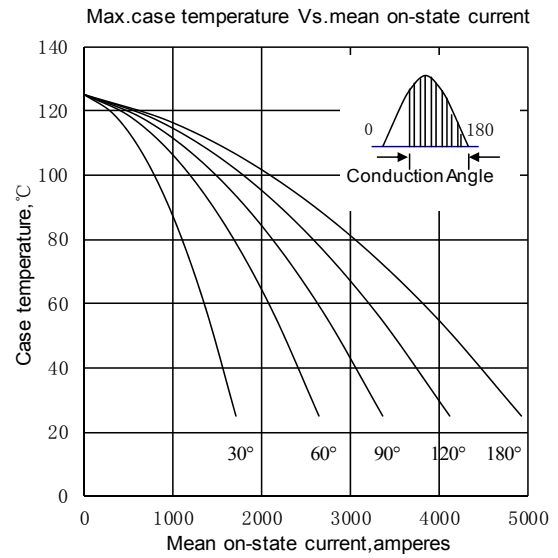


Fig. 4

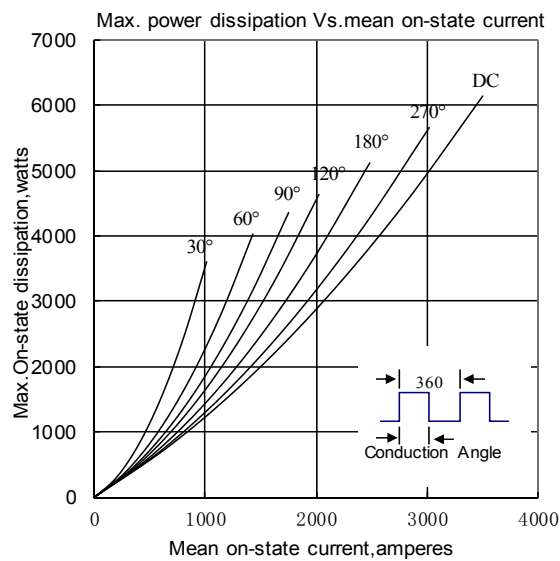


Fig. 5

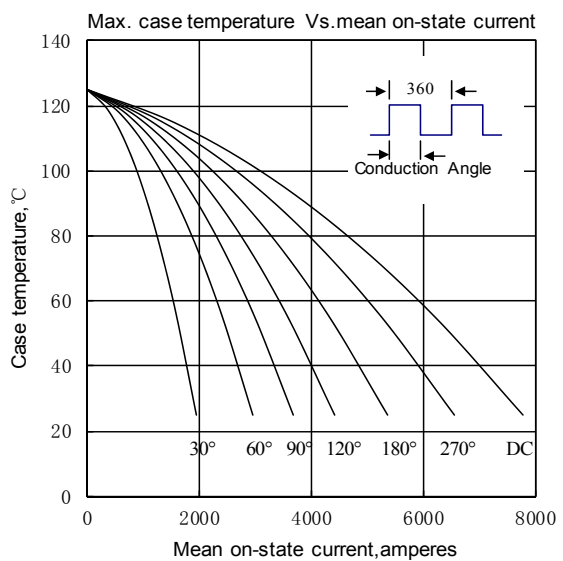


Fig. 6

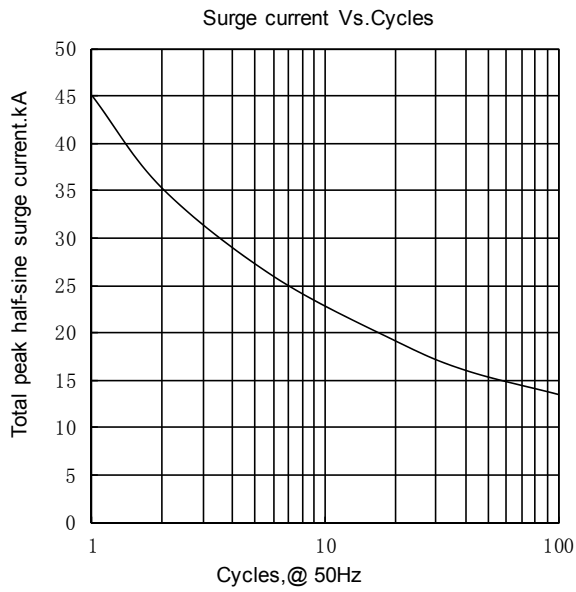


Fig.7

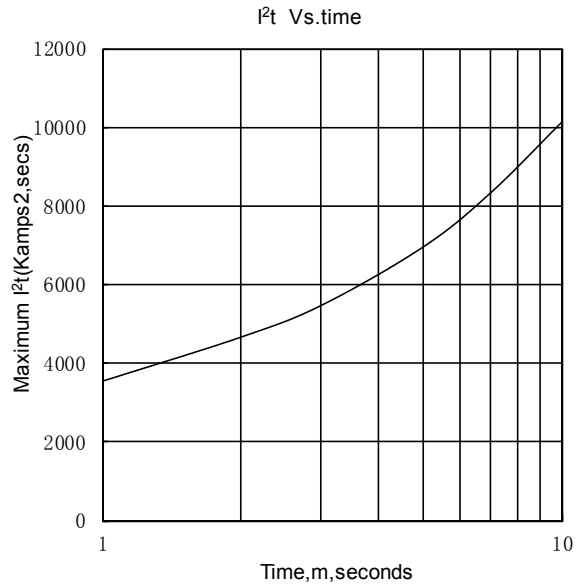


Fig.8

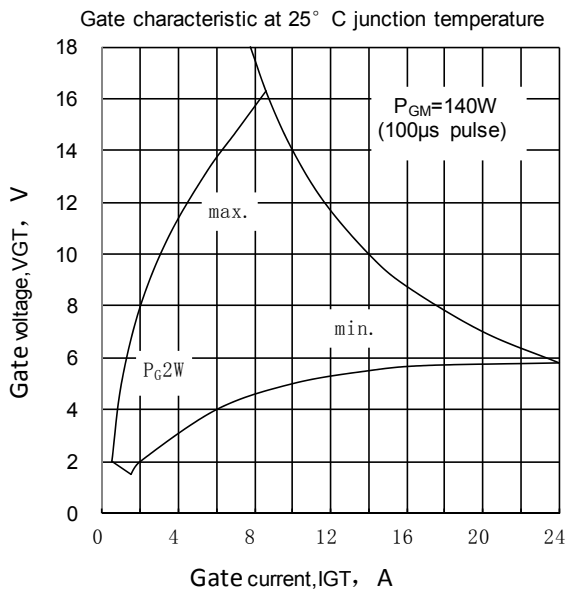


Fig.9

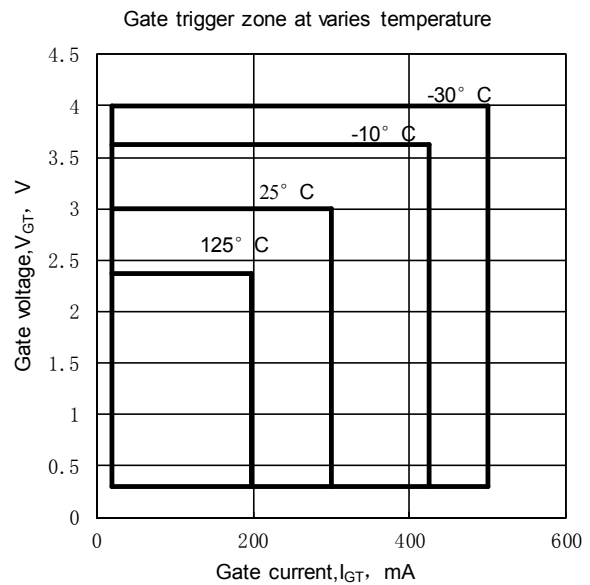


Fig.10

Outline:

