**Features:**

- Isolated mounting base 3000V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

**Typical Applications**

- Various rectifiers
- DC supply for PWM inverter

$V_{RSM}$	$V_{RRM}$	Type & Outline
2100V	2000V	MDx1200-20-432F2
2300V	2200V	MDx1200-22-432F2
2600V	2500V	MDx1200-25-432F2

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, $T_c=100^{\circ}\text{C}$	150			1200	A
$I_{F(RMS)}$	RMS forward current		150			1884	A
$I_{RRM}$	Repetitive peak current	at $V_{RRM}$	150			50	mA
$I_{FSM}$	Surge forward current	10ms half sine wave $V_R=0.6V_{RRM}$	150			28	kA
$I^2t$	$I^2t$ for fusing coordination					3920	$\text{A}^2\text{s}\cdot 10^3$
$V_{FO}$	Threshold voltage		150			0.70	V
$r_F$	Forward slope resistance					0.10	m $\Omega$
$V_{FM}$	Peak forward voltage	$I_{FM}=3000\text{A}$	25			1.80	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine Single side cooled				0.042	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink	At 180° sine Single side cooled				0.020	$^{\circ}\text{C}/\text{W}$
$V_{ISO}$	Isolation voltage	50Hz, R.M.S, $t=1\text{min}$ , $I_{ISO}=1\text{mA}(\text{max})$		3000			V
$F_m$	Terminal connection torque(M16)				12.0		N·m
	Mounting torque(M6)				6.0		N·m
$T_{vj}$	Junction temperature			-40		150	$^{\circ}\text{C}$
$T_{stg}$	Stored temperature			-40		125	$^{\circ}\text{C}$
$W_t$	Weight				3660		g
Outline	432F2						

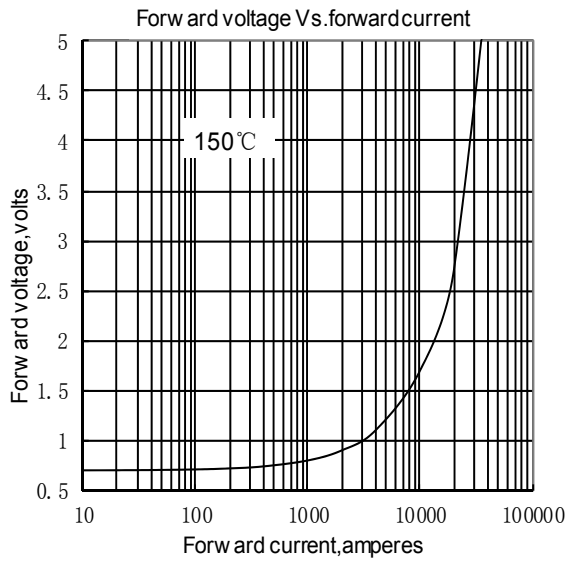


Fig.1

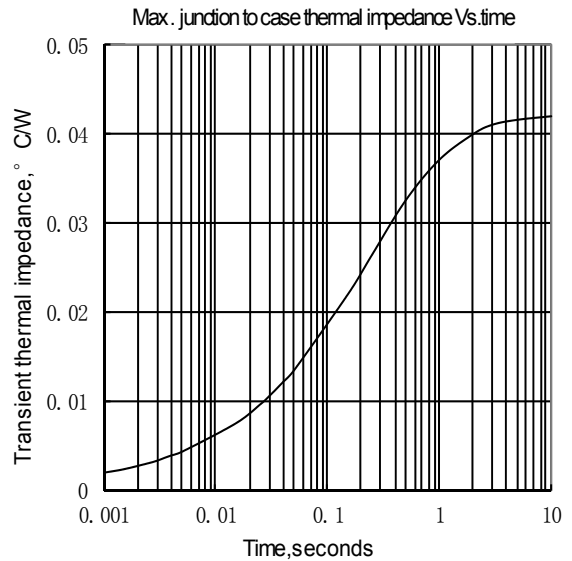


Fig.2

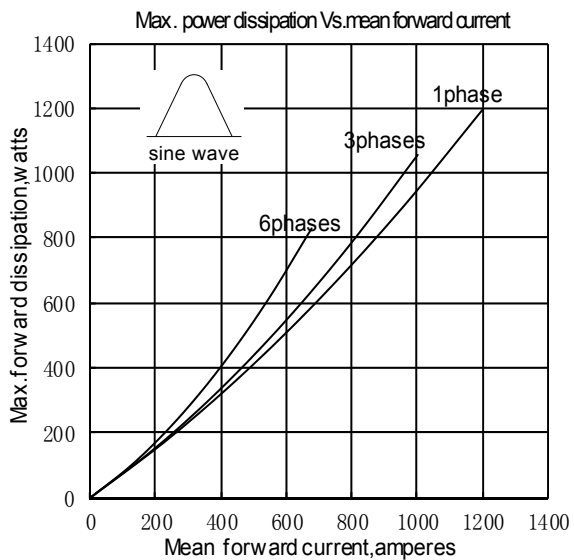


Fig.3

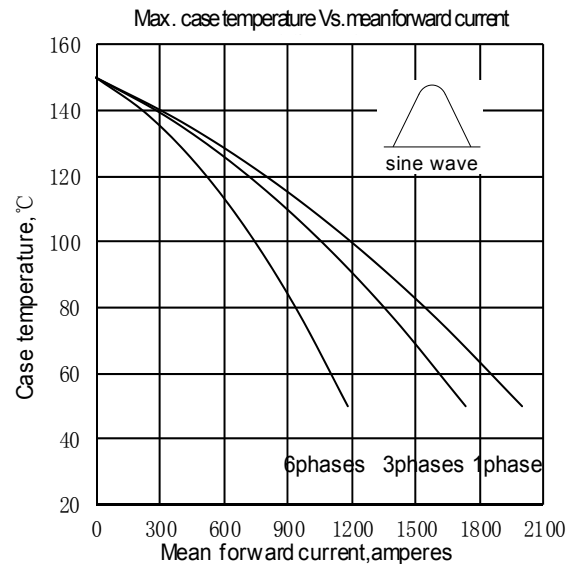


Fig.4

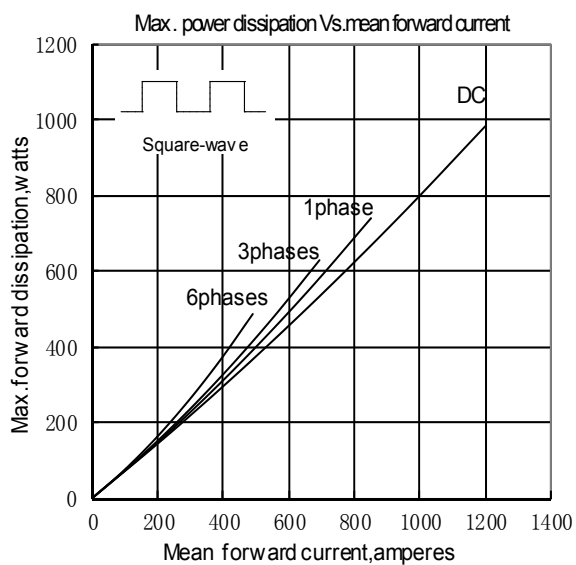


Fig.5

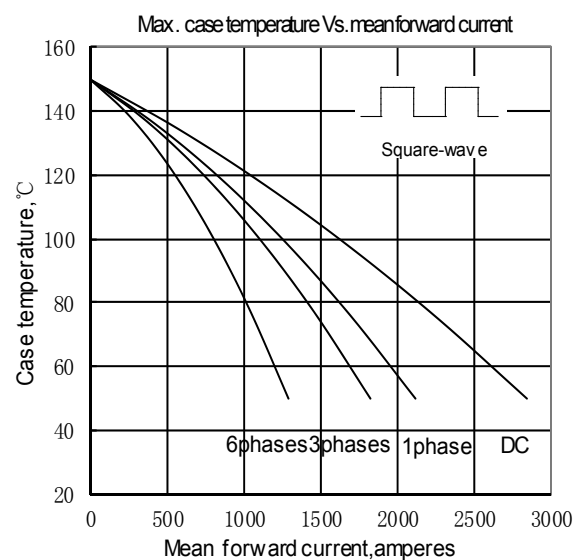


Fig.6

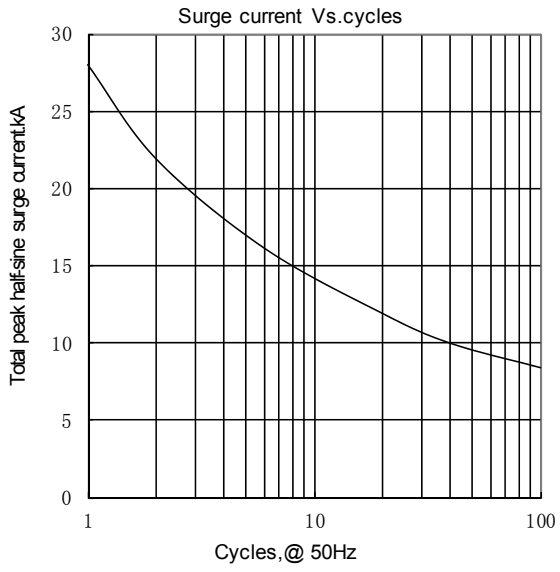


Fig.7

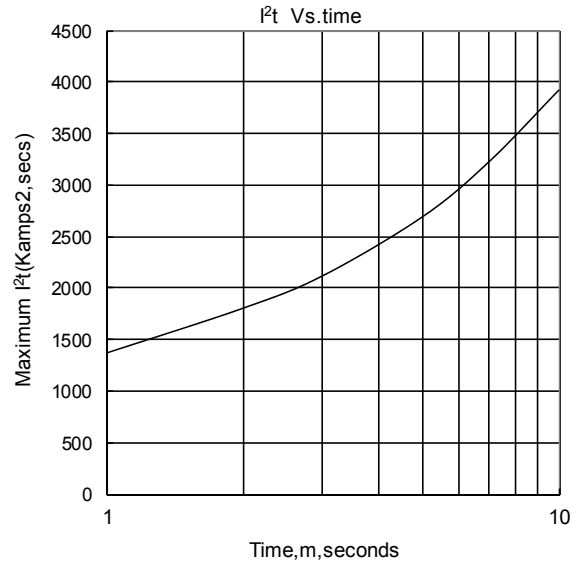


Fig.8

Outline:

